



**FITTING INSTRUCTIONS FOR BLP0032SI REAR FOOTREST BLANKING
PLATES
YAMAHA MT-07 2014-**



Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

TOOLS REQUIRED

- 3, 5, 6 & 8mm A/F Allen key.
- 8mm spanner or socket & wrench.



Picture 1



Picture 2



Picture 3



Picture 4




Picture 5



Picture 6



Picture 7

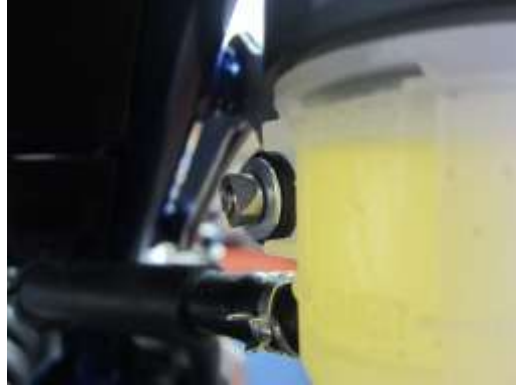

Picture 8

FITTING INSTRUCTIONS

- Undo the two bolts shown in picture 1 and remove rear pillion footrest from both sides of the bike.
- On the right hand pillion footrest, remove the bracket that mounts the brake reservoir by removing the 8mm nut as shown in pictures 2 and 3.
- Fit two of the M8 counter-sunk head bolts through the holes in each of the blanking plates as shown in pictures 4 and 5.
- On the left side of the bike, the blanking plate bolts straight into place.
- On the right side of the bike, the blanking plate fits in front of the mounting bracket which supports the brake reservoir, as shown in pictures 4 and 5.
- This can now be fitted to the bike, as shown in picture 6.
- Locate the M5 x 20mm long button head bolt through the small hole on the brake reservoir mount, then through the brake reservoir rubber mount, before fitting the M5 washer and nyloc nut on the rear, as shown in pictures 7 & 8, before tightening.
- Tighten all bolts evenly.

ISSUE 1 14/03/2014 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



INSTRUCTIONS DE MONTAGE BLP0032SI PLAQUES PROTECTION
REPOSE PIED
YAMAHA MT-07 2014-



NOTEZ QUE SI LES KITS SONT EMBALLES AVEC DES RONDELLES EN CAOUTCHOUC SERVANT A TENIR LES
COMPOSANTS, CES RONDELLES DOIVENT ETRE JETTES

La façon dont le kit est emballé ne correspond pas forcément à la façon de monter les pièces sur la moto.

LES PIÈCES PRÉSENTÉES PEUVENT N'ÊTRE QUE REPRESENTATIVES, AFIN DE FACILITER ET CLARIFIER LES INSTRUCTIONS DE MONTAGE.

Outils requis

- Clé Allen 3, 5, 6 & 8mm.
- Clé à molette 8mm ou clé à douille.

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7

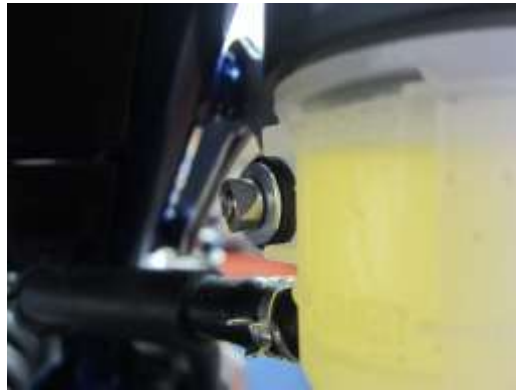


Photo 8

Instructions de montage:

- Enlever les 2 vis (photo 1) et enlever le repose pied passager arrière des 2 cotés de la moto.
- Sur le repose pied passager arrière, enlever le support qui fixe le réservoir liquide de frein en enlevant l'écrou 8mm (photos 2 et 3).
- Passer les 2 vis M8 à travers les trous dans chacune des plaques comme indiqué sur les photos 4 et 5.
- Du côté gauche de la moto, les boulons de la plaque sont en place.
- Du côté droit de la moto, la plaque se place à l'avant du support de fixation qui supporte le réservoir liquide de frein (photos 4 et 5).
- Elle peut à présent être montée sur la moto (photo 6).
- Placer le boulon M5 x 20mm à travers le petit trou sur le support de réservoir liquide de frein puis à travers le support en caoutchouc du réservoir liquide de frein, avant d'insérer une rondelle M5 et un écrou nylon à l'arrière (photos 7 & 8) avant de serrer.
- Serrer tous les boulons de façon égale.

ISSUE 1 14/03/2014 (NSY)



MONTAGEANLEITUNG FÜR BLP0032SI
HINTERE HALTEPLATTE FÜR DEN BREMSFLÜSSIGKEITSBEHÄLTER
YAMAHA MT-07 AB MODELL 2014



Hinweis: Die Verpackung der Teile stellt nicht die Reihenfolge der Montage dar.

DIE UNTEN ABGEBILDETEN TEILE DIENEN LEDIGLICH ZUR ERKLÄRUNG

Hinweis für Kits mit Plastikunterlegscheiben an den Schrauben – *Diese Plastikunterlegscheiben werden nicht für den Einbau benötigt!*

SIE BENÖTIGEN FOLGENDES WERKZEUG:

- 3, 5, 6 & 8mm Inbusschlüssel
- 8mm Schraubenschlüssel oder Steckschlüssel



ABBILDUNG 1



ABBILDUNG 2



ABBILDUNG 3



ABBILDUNG 4



ABBILDUNG 5



ABBILDUNG 6



ABBILDUNG 7

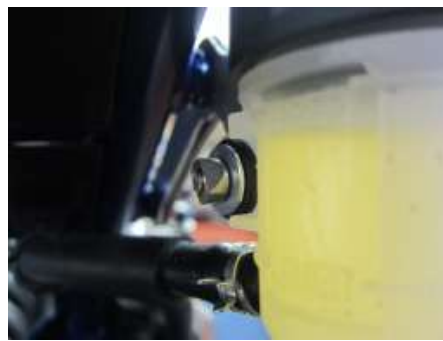


ABBILDUNG 8

MONTAGEANLEITUNG:

- Lösen Sie die zwei Schrauben, die in Abbildung 1 abgebildet sind und entfernen Sie die hinteren Fußrasten.
- Die Halterung für den Bremsflüssigkeitsbehälter an der rechten Fußraste entfernen, indem Sie die 8mm Mutter entfernen – siehe Abbildungen 2 und 3.
- Montieren Sie zwei M8 Senkkopfschrauben durch die beiden Halteplatten wie in den Abbildungen 4 und 5 abgebildet.
- Auf der linken Seite des Motorrades kann die Halteplatte direkt angeschraubt werden.
- Auf der rechten Seite des Motorrades wird die Halteplatte vor der Montagehalterung, die den Bremsflüssigkeitsbehälter befestigt, montiert – siehe Abbildungen 4 und 5.
- Jetzt montieren – siehe Abbildung 6.
- Führen Sie die M5 x 20mm Halbrundkopfschraube durch die kleine Öffnung in der Halterung für den Bremsflüssigkeitsbehälter, dann durch die Gummihalterung für den Bremsflüssigkeitsbehälter, bevor Sie die M5 Unterlegscheibe und selbstsichernde Mutter hinten anbringen und befestigen – siehe Abbildungen 7 & 8.
- Ziehen Sie alle Schrauben gleichmäßig fest.

AUSGABE 1 14/03/2014 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com