




**Fitting Instructions for RAD0096 Radiator Guard
YAMAHA XJ6 / DIVERSION / DIVERSION F 2010-**



PICTURE 1

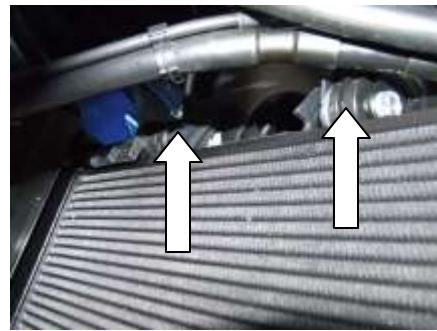

PICTURE 2



PICTURE 3



PICTURE 4

In This Kit There Should Be
1x Radiator Guard (RAD0096)
1x M6 Washer
2x 100mm Lengths of Foam
2x Cable ties

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Fitment to all bikes up to '13 year.

- To fit the radiator guard to the bike cut the foam strip provided into 10mm wide pieces and stick them to the back of the radiator guard frame, so that they sit between the radiator guard and the radiator.
- Remove the bottom radiator mounting bolt in position arrowed in picture 1.
- Fit the radiator guard and secure the top mounting brackets using the two cable ties in position arrowed in picture 2.
- Secure the bottom mounting bracket in position arrowed in picture 1 using original bolt.

Fitment to '13 model.

- To fit the radiator guard to the bike cut the foam strip provided into 10mm wide pieces and stick them to the back of the radiator guard frame, so that they sit between the radiator guard and the radiator.
- Remove the bottom radiator mounting bolt and top hat spacer as arrowed in picture 3.
- With these removed the plastic radiator grill can be pulled outward at the bottom, allowing access to slide the R&G Radiator Guard up behind it, as shown in picture 4.
- Secure the top mounting brackets using the two cable ties in position arrowed in picture 2.
- Secure the bottom mounting bracket in position by sliding the OEM top hat spacer through the radiator guard mounting hole, then through the plastic grill mounting hole and into the rubber mount. Then insert original bolt and tighten.

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



INSTRUCTIONS DE MONTAGE POUR **RAD0096 Grille de protection radiateur**
YAMAHA XJ6 / DIVERSION / DIVERSION F 2010-



PHOTO 1

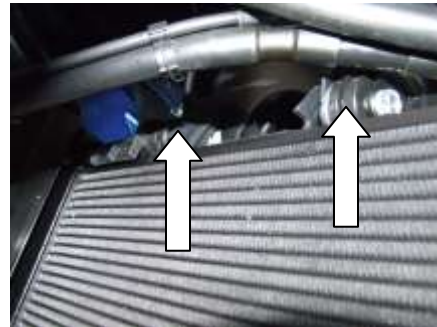


PHOTO 2



PHOTO 3



PHOTO 4

Ce kit doit contenir :
1x Grille de protection radiateur (RAD0096)
1x M6 Rondelle
2x 100mm Longueur de mousse autocollante
2x Colliers de serrage

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Couper des morceaux de mousse de 10 mm environ et placez ceux-ci sur la grille de protection (les mettre entre la grille et le radiateur).
- Enlever la vis de fixation de radiateur en bas (voir photo 1).
- Placez la protection de radiateur sur la moto et fixez la partie supérieure à l'aide des 2 câbles en plastique. Voir Photo 2
- Fixez la fixation basse à l'aide du boulon d'origine (photo 1).

Fitment to '13 model.

- Couper des morceaux de mousse de 10 mm environ et placez ceux-ci sur la grille de protection (les mettre entre la grille et le radiateur).
- Enlever le boulon de fixation radiateur inférieur et l'entretoise supérieure (Photo 3).
- La grille de radiateur en plastique peut maintenant être extraite, permettant l'accès nécessaire pour glisser la protection radiateur R&G (Photo 4).
- Fixer les supports supérieurs à l'aide de 2 colliers de serrage (Photo 2).
- Fixer le support inférieur en position en glissant l'entretoise d'origine à travers le trou de fixation de la protection, puis à travers le trou de fixation de grille de plasti et dans le support en caoutchouc. Insérez ensuite le boulon puis serrez.



**Montageanleitung für den RAD0096 Kühlerschutz
YAMAHA XJ6 / DIVERSION / DIVERSION F 2010**



ABBILDUNG 1

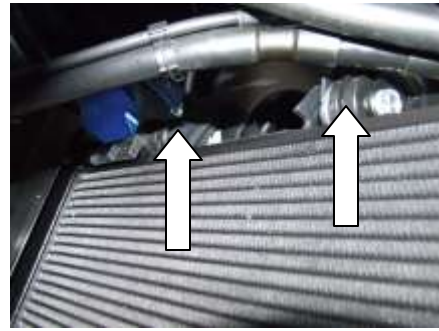


ABBILDUNG 2



ABBILDUNG 3



ABBILDUNG 4

Dieser Kit enthält:
1x Kühlerschutz (RAD0096)
2x 100mm Schaumstoffstreifen
1x M6 Unterlegscheibe
2x Kabelbinder



Montageanleitung für alle Modelle bis Modelljahr 2013:

- Um den Kühlerschutz am Motorrad zu montieren, schneiden Sie zuerst die mitgelieferten Schaumstoff-Streifen in 10 mm breiten Streifen und kleben Sie diese auf der Rückseite des Kühlerschutzrahmens, so dass sie zwischen dem Kühlerschutz und dem Kühler angebracht sind.
- Entfernen Sie die untere Montageschraube am Kühler (siehe Abbildung 1).
- Montieren Sie den Kühlerschutz und befestigen Sie ihn mit den zwei Kabelbindern (wie in Abbildung 2 abgebildet).
- Befestigen Sie den Kühlerschutz am unteren Halter mit der Originalschraube (siehe Abbildung 1).

Montageanleitung für das Modelljahr 2013:

- Um den Kühlerschutz am Motorrad zu montieren, schneiden Sie zuerst die mitgelieferten Schaumstoffstreifen in 10 mm breiten Streifen und kleben Sie diese auf der Rückseite des Kühlerschutzrahmens, so dass sie zwischen dem Kühlerschutz und dem Kühler angebracht sind.
- Entfernen Sie die untere Montageschraube und die Distanzbuchse am Kühler (siehe Abbildung 3).
- Wenn diese entfernt sind, ziehen Sie den Plastik Kühlerschutz nach unten –den R&G Kühlerschutz nun hinter dem Plastik Kühlerschutz montieren, wie in Abbildung 4 abgebildet.
- Befestigen Sie die oberen Montagehalterungen in Position mit den zwei Kabelbindern (Siehe Abbildung 2).
- Befestigen Sie den unteren Montagehalter: Führen Sie die Originaldistanzbuchse durch das Montage Loch für die Kühlerhalter, durch die Plastik Kühlerhalter dann in die Gummihalterung. Die Originalschraube montieren und festziehen.

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

Ausgabe 2

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com