




FITTING INSTRUCTIONS FOR SCG0015 OIL COOLER GUARD
HONDA CBR1000RR-R & SP 2020-

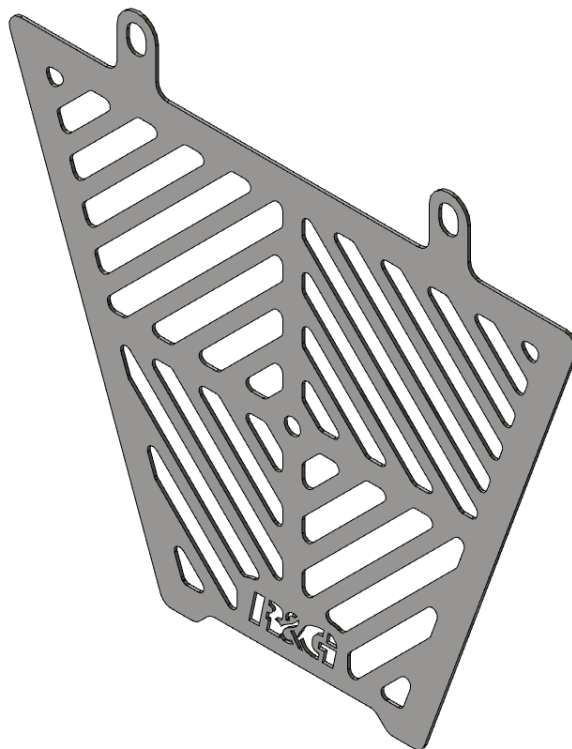

THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.
SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF
MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:


WWW.RG-RACING.COM



<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
<ul style="list-style-type: none"> • Set of allen keys to include 4 & 5mm <ul style="list-style-type: none"> • 10mm spanner 	<p>M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm</p>

LEGEND

ITEM NO.	DESCRIPTION	QTY
ITEM 1	SCG0015 OIL COOLER GUARD	1
ITEM 2	M6 x 20MM BUTTON HEAD BOLT	2
ITEM 3	M6 WASHER	2
ITEM 4	M6 NYLOC NUT	2
ITEM 5	SELF-ADHESIVE FOAM 100mm	2

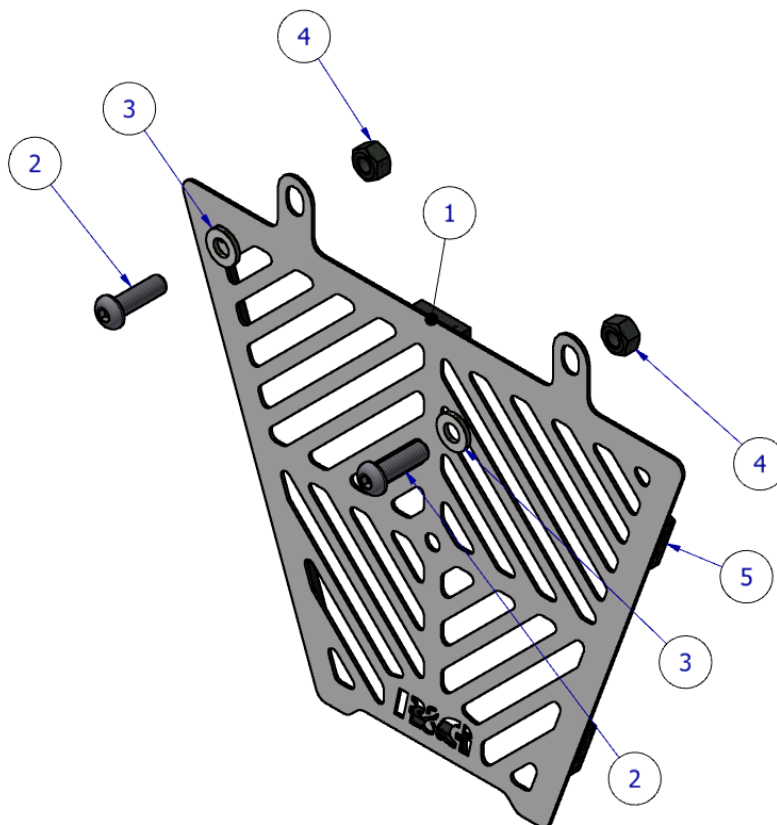

ASSEMBLY DIAGRAM 1



FITTING PICTURES




Picture 1




Picture 2




Picture 3

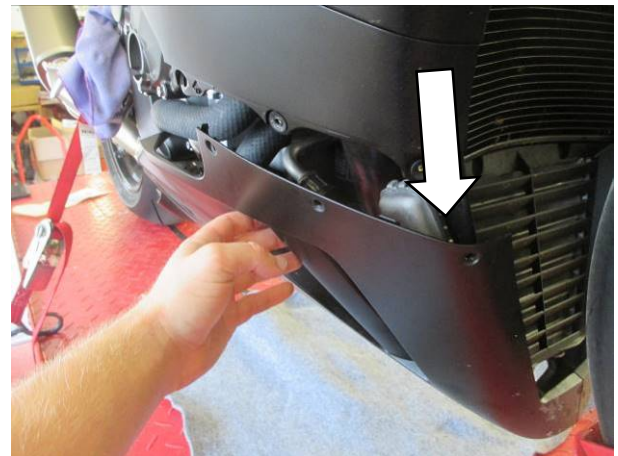


Picture 4

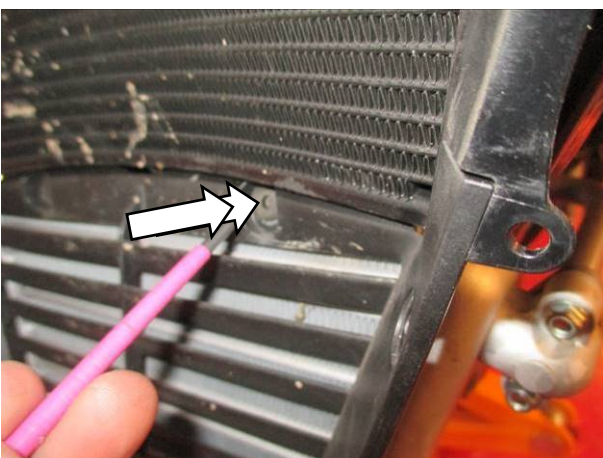

Picture 5

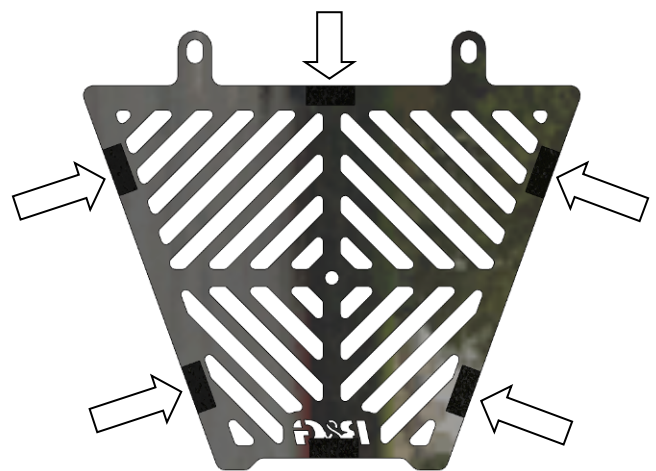


Picture 6

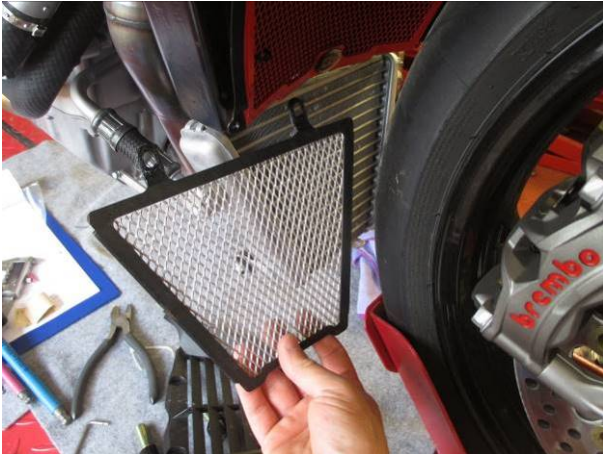


Picture 7



Picture 8

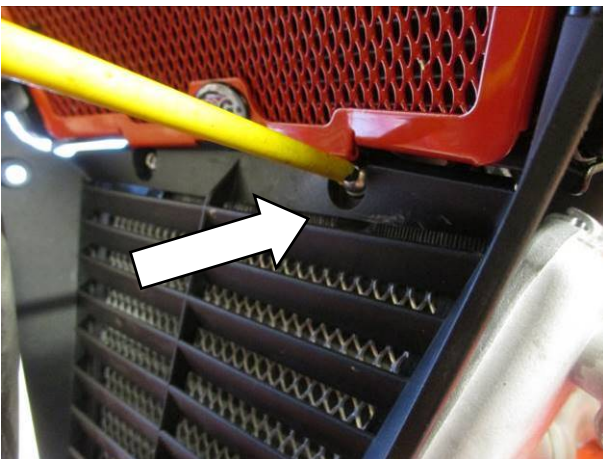

Picture 9

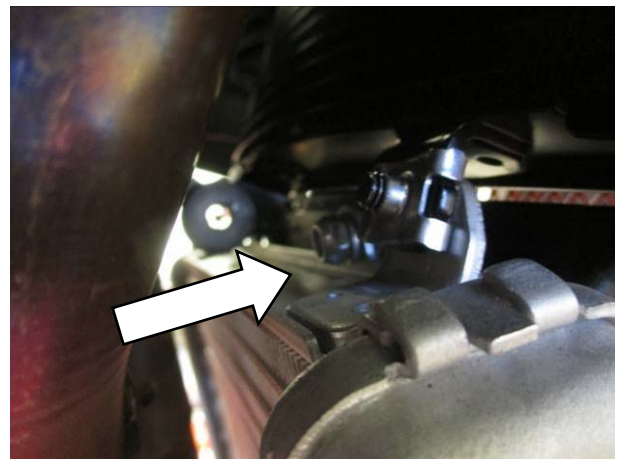

Picture 10

FITTING INSTRUCTIONS

- To begin, the belly pan must be removed, to do this both left and right-handed lower side panels should be removed as one unit. First place a soft material under the bike to prevent any damage to the fairing during removal.
- Remove the two rear-most fasteners on each side as shown in **picture 1** using a 5mm allen key.
- Remove the pop pins from the inner section of the belly fairing by depressing the centre pin and removing the plastic spreader as shown in **picture 2**.
- While supporting the belly pan from underneath, remove the 3 x allen head bolts from each side as shown in **picture 3**.
- Lower the belly pan away from the bike as shown in **picture 4**. Tilt the belly pan and slide the unit out from under the bike ensuring not to damage the paintwork.
- Remove the two pop pins from the upper section of the plastic OEM air deflector the same way as before as shown in **picture 5**.
- Lean the OEM air deflector forwards and lift to release the lower securing tabs from the oil cooler.
- Cut the adhesive foam (item 5) into 10mm strips and affix to the rear inner frame of the of the oil cooler guard (item 1) as shown in **picture 6**.
- Offer the oil cooler guard into position so that the mounting holes line up to the OEM air deflector holes as shown in **picture 7**.
- Replace the OEM air deflector over the top of the R&G Oil cooler guard as shown in **picture 8**. Lift the oil cooler guard up so it sits on top of the locating tabs of the OEM air deflector.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Now follow the assembly diagram on page 2 and put one M6 washer (item 3) over each M6 Bolt (item 2) and place through the OEM air deflector and oil cooler guard as shown in **picture 9**.
- Fasten each M6 bolt with one M6 nut (item 4) over the exposed thread as shown in **picture 10**.
- Tighten the nut using a 4mm Allen key and 10mm spanner to the recommended torque to secure both rad guard and OEM plastic component. **DO NOT OVERTIGHTEN.**
- Re-fit the belly pan fairing as before.
- Check all components are secure and all bolts are tight before riding.

ISSUE 1 – 19/10/2021 (DM)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.


R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



**NOTICE DE MONTAGE POUR SCG0015 GRILLE DE REFROIDISSEUR D'HUILE
HONDA CBR1000RR-R & SP 2020-**

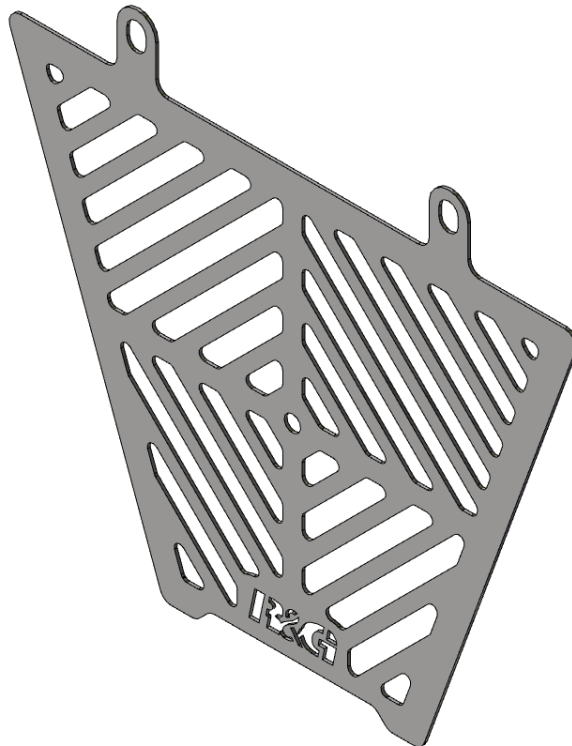

CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS REVENDEURS OU FAITES APPEL À UN TECHNICIEN QUALIFIÉ.

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA MANIÈRE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS, ELLES PEUVENT ÊTRE JETÉES.

NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR :

WWW.RG-RACING.COM

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ


Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



<u>TOOLS REQUIRED</u>	<u>VALEURS DE SERRAGE</u>
<ul style="list-style-type: none"> • Clés Allen 4 & 5mm • Clé à molette 10mm 	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

LÉGENDE

ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	SCG0015 GRILLE DE PROTECTION REFROIDISSEUR D'HUILE	1
ARTICLE 2	M6 x 20MM BOULON	2
ARTICLE 3	M6 RONDELLE	2
ARTICLE 4	M6 ÉCROU	2
ARTICLE 5	MOUSSE AUTOCOLLANTE 100mm	2

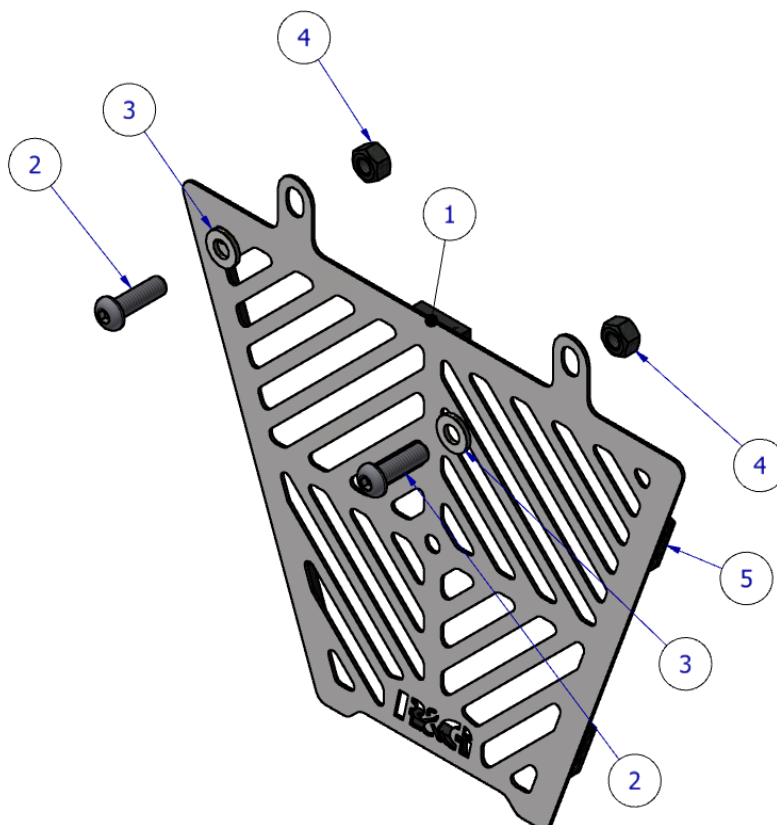

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



SCHÉMA D'ENSEMBLE 1
PHOTOS DE MONTAGE



Photo 1



Photo 2



Photo 3



Photo 4

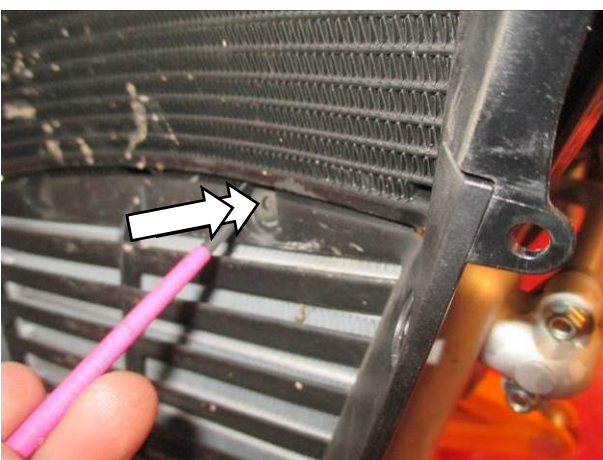


Photo 5

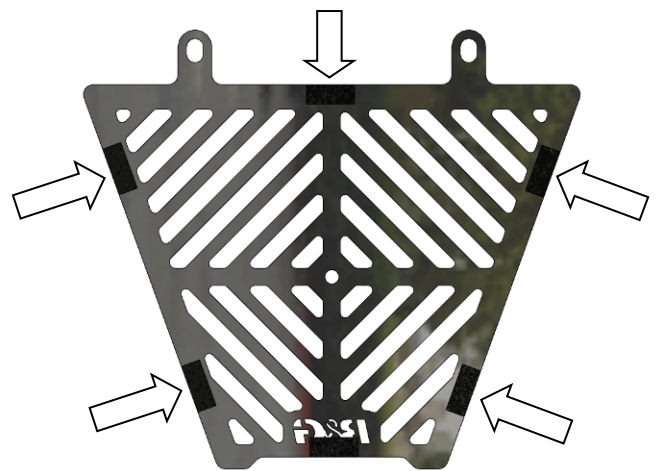


Photo 6

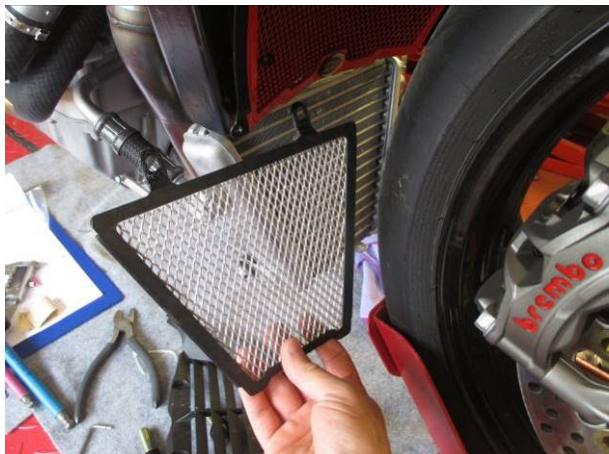


Photo 7



Photo 8

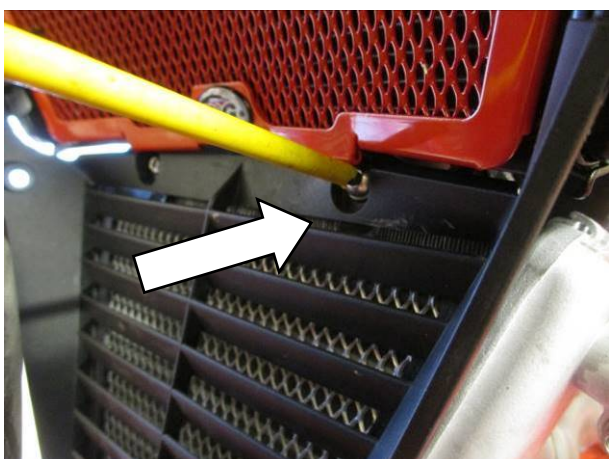


Photo 9

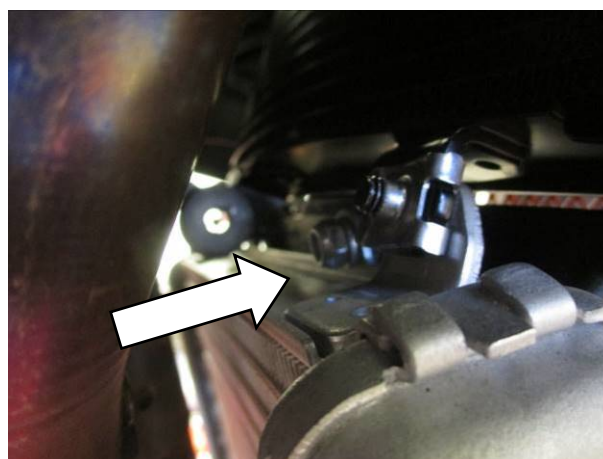


Photo 10

NOTICE DE MONTAGE

- Pour commencer, le sabot doit être retiré, pour ce faire, les panneaux latéraux inférieurs gauche et droit doivent être retirés en une seule unité. Placez d'abord un matériau souple sous la moto pour éviter d'endommager le carénage lors du démontage.
- Retirez les deux attaches les plus à l'arrière de chaque côté comme indiqué sur la photo 1 à l'aide d'une clé Allen de 5 mm.
- Retirez les goupilles de la section intérieure du carénage ventral en appuyant sur la goupille centrale et en retirant l'écarteur en plastique comme indiqué sur la photo 2.
- Tout en soutenant le sabot moteur par le dessous, retirez les 3 boulons Allen de chaque côté comme indiqué sur la photo 3.
- Abaissez le sabot moteur comme indiqué sur la photo 4. Inclinez le sabot moteur et faites glisser l'unité hors de la moto en vous assurant de ne pas endommager la peinture.
- Retirez les deux goupilles de la partie supérieure du déflecteur d'air d'origine en plastique de la même manière que précédemment, comme indiqué sur la photo 5.
- Penchez le déflecteur d'air d'origine vers l'avant et soulevez-le pour libérer les languettes de fixation inférieures du refroidisseur d'huile.
- Couper la mousse adhésive (article 5) en bandes de 10 mm et la fixer sur le cadre intérieur arrière de la protection de radiateur d'huile (article 1) comme indiqué sur la photo 6.
- Placez la protection du refroidisseur d'huile de manière à ce que les trous de montage s'alignent sur les trous du déflecteur d'air d'origine, comme indiqué sur la photo 7.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Remplacez le déflecteur d'air d'origine sur le dessus de la protection du refroidisseur d'huile R&G comme indiqué sur la photo 8. Soulevez la protection du refroidisseur d'huile pour qu'elle repose sur les languettes de positionnement du déflecteur d'air d'origine.
- Suivez maintenant le schéma d'assemblage à la page 2 et placez une rondelle M6 (article 3) sur chaque boulon M6 (article 2) et placez-la à travers le déflecteur d'air d'origine et la protection du refroidisseur d'huile comme indiqué sur la photo 9.
- Fixez chaque boulon M6 avec un écrou M6 (article 4) sur le filetage exposé comme indiqué sur la photo 10.
- Serrez l'écrou à l'aide d'une clé Allen de 4 mm et d'une clé de 10 mm au couple recommandé pour fixer à la fois la protection et le composant en plastique d'origine. NE PAS TROP SERRER.
- Remonter le carénage de sabot moteur comme précédemment.
- Vérifiez que tous les composants soient sécurisés et que tous les boulons soient serrés avant de rouler

ISSUE 1 – 19/10/2021 (DM)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com