



Fitting Instructions for RAD0143BK Radiator Guard
SUZUKI INAZUMA 250 2012




In This Kit There Should Be
1x Radiator Guard (RAD0143BK).
2x 100mm Lengths of self-adhesive Foam.
1 x M6x20mm long button head bolt.
1 x M6 Nyloc nut.

TOOLS REQUIRED

- Socket set to include 10 & 12mm socket & wrench.
 - 4mm Allen key.



PICTURE 1

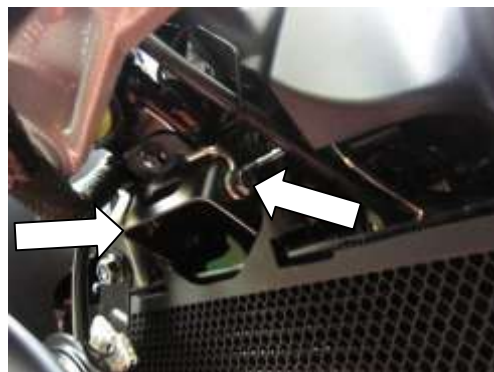

PICTURE 2



PICTURE 3

FITTING INSTRUCTIONS

- To fit the radiator guard to the bike cut the foam strip provided into 10mm wide pieces and stick them to the back of the radiator guard frame, so that they sit between the radiator guard and the radiator also stick a piece on the lower right hand 'U' shaped section.
- Remove the bolt that secures the horn bracket in place as arrowed in picture 1 and remove horn and bracket for ease of fitment.
- Remove the two upper mounting bolts as arrowed in picture 2.
- Remove the lower mounting bolt as arrowed in picture 3.
- Offer the radiator guard into position ensuring the 'U' shaped section fits under the radiator and secure the two upper mounts using the original bolts.
- Using the new bolt and nut secure the lower mounting bracket.
- Refit the horn and horn mounting bracket as original.
- Tighten all bolts evenly and ensure the radiator is correctly mounted.

ISSUE 1 22/01/2013 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect.

Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



**Instructions de montage pour RAD0143BK Protection radiateur
SUZUKI INAZUMA 250 2012**



Le kit doit contenir :

- 1x Protection radiateur (RAD0143BK).**
- 2x 100mm Longueur de mousse autocollante**
- 1 x M6x20mm Boulon à tête ronde**
- 1 x M6 Ecrou en Nyloc**

Outils requis

- Clé à molette 10 & 12mm
- Clé Allen 4mm



PHOTO 1

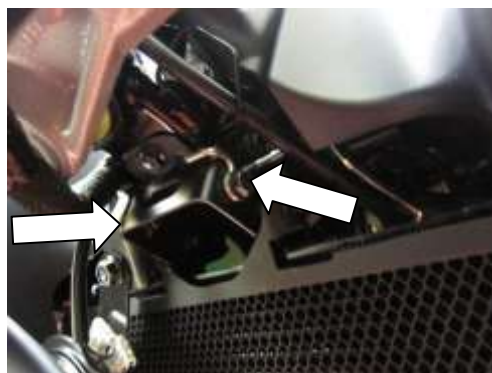


PHOTO 2



PHOTO 3

Instructions de montage :

- Couper la mousse en bandeaux de 10mm puis collez ces bandeaux au bas du support de protection radiateur, de façon à ce que ces bandeaux se situent entre la protection radiateur et le radiateur. Collez également un morceau sur la section basse du coté droit (« U »)
- Enlever le boulon qui fixe le support de corne (photo 1) et enlever la corne et le support pour faciliter l'installation.
- Enlever les 2 boulons de fixation supérieurs (photo 2).
- Enlever le boulon de fixation inférieur (photo 3).
- Mettre la protection radiateur en position en vous assurant que la section en 'U' se place sous le radiateur et fixer les 2 supports supérieurs avec les boulons d'origine.
- Avec le nouveau boulon et l'écrou, fixer le support de fixation inférieur.
- Remettre la corne ainsi que le support de corne, comme à l'origine.
- Serrer tous les boulons de façon égale et assurez vous que le radiateur soit correctement monté.

ISSUE 1 22/01/2013 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect.

Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Montageanleitung für den RAD0143BK Kühlerschutz
SUZUKI INAZUMA 250 2012



Dieser Kit beinhaltet:
1x Kühlerschutz (RAD0143BK)
2x 100mm selbstklebende Schaumstoffstreifen
1 x M6x20mm Halbrundkopfschraube
1 x M6 selbstsichernde Mutter

SIE BENÖTIGEN FOLGENDES WERKZEUG:

- 10 & 12mm Steckschlüssel
- 4mm Inbusschlüssel



ABBILDUNG 1

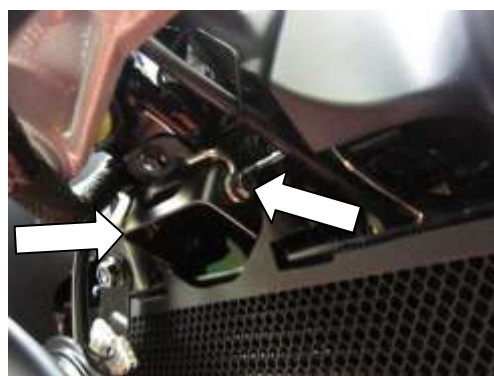


ABBILDUNG 2



ABBILDUNG 3

MONTAGEANLEITUNG

- Um den Kühlerschutz am Motorrad zu montieren, schneiden Sie zuerst die mitgelieferten Schaumstoffstreifen in 10 mm breiten Streifen und kleben Sie diese auf der Rückseite des Kühlerschutzrahmens, so dass sie zwischen dem Kühlerschutz und dem Kühler angebracht sind. Kleben Sie auch Schaumstoffstreifen auf dem „U“-förmigen Teil rechts unten
- Entfernen Sie die Schraube, die die Halterung für die Hupe befestigt (siehe Abbildung 1) und entfernen Sie die Hupe und die Halterung.
- Entfernen Sie die zwei oberen Montageschrauben (siehe Abbildung 2).
- Entfernen Sie die untere Montageschraube (siehe Abbildung 3).
- Den Kühlerschutz in Position bringen - hierbei darauf achten, dass der „U“-förmige Teil unter dem Kühler ist – befestigen Sie die zwei oberen Halterungen mit den Originalschrauben.
- Verwenden Sie die neue Schraube und Mutter, um die untere Halterung zu befestigen.
- Montieren Sie die Hupe und die Halterung wie ursprünglich.
- Ziehen Sie alle Schraube gleichmäßig fest und überprüfen Sie, dass der Kühler ordnungsgemäß montiert ist.

AUSGABE 1 22/01/2013 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect.

Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com